

Equalizer

6-18GHz /9dB, Low Insertion Loss

Model: TLME-6G18G-09

The TLME-6G18G-09 is a equalizer. It is a positive gain slope equalizer designed to pass 6 to 18GHz. Equalization can be applied to reduce low pass filtering effects in both RF/microwave and high speed digital systems.

Features:

- Ultra Wide Band: 6-18 GHz
- Good gain equalization
- Small Size and simple to use
- Excellent return loss

Applications:

- Cable or Waveguide Loss Compensation
- Amplifier Flatness Compensation
- Microwave Radio
- RF Transceivers
- Telecom Infrastructure

电气特性 Electrical Characteristics:


参数 Parameter		Min	Typ	Max	单位 Units
频率范围 Frequency range		6-18			GHz
插损 Insertion Loss	@6G		10.5		dB
	@20GHz		1.5		
回波损耗 Return Loss			-15		dB
耐受功率 Power Handling			30		dBm
阻抗 Impedance		50			Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA	
长度 Length	42.2	mm

外形图 Outline Drawing:


Unit:mm

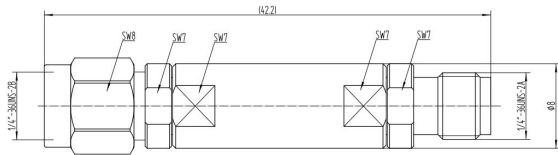

TLME-6G18G-09

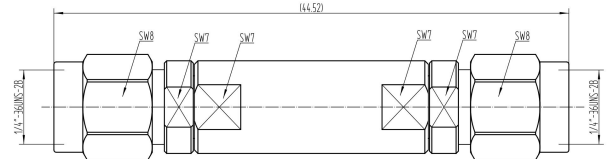

TLME-6G18G-09-MM

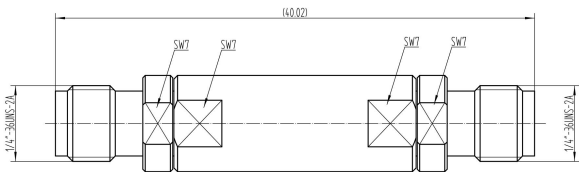

TLME-6G18G-09-FF

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLME-6G18G-09	Equalizer, 6-18GHz, Insertion loss:10.5dB@6G; 1.5dB@18GHz SMA Male/SMA Female	Rev.1.0
TLME-6G18G-09-MM	Equalizer, 6-18GHz, Insertion loss:10.5dB@6G; 1.5dB@18GHz SMA Male/SMA Male	Rev.1.0
TLME-6G18G-09-FF	Equalizer, 6-18GHz, Insertion loss:10.5dB@6G; 1.5dB@18GHz SMA Female/SMA Female	Rev.1.0