

Solid State High Power Amplifier Systems

2.5-6GHz /60dB Gain/60 dBm Psat/380V AC

Model: TLPA2.5G6G-60-60-BC

TLPA2.5G6G-60-60-BC is a solid state high power amplifier systems provides high output power and high gain across the 2.5 to 6 GHz frequency range. The amplifier features a built-in 380V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

Features:

- Wide Band: 2.5-6GHz
- Gain: 60dB Min
- Psat Output Power:60dBm Min
- Protection:Over TEM,over voltage, over current ,over VSWR protection
- 50 Ohm Matched Input / Output

电气特性 Electrical Characteristics:

| 参数 Parameter | 代码 Symbol | Min | Typ | Max | 单位 Units |
|-------------------------|-------------|---------------------|---------|-------|----------|
| 频率范围 Frequency range | BW | 2.5-6 | | | GHz |
| 工作模式 Working Mode | MOD | CW/PULSE compatible | | | |
| 功率增益 Power Gain | GP | 60 | | | dB |
| 增益平坦度 Gain flatness | Δ GL | | ± 4 | | dB |
| 饱和输出功率 Output Psat | Psat | 60 | | | dBm |
| 杂散 Spurious@Pout=60dBm | Spur | | | -60 | dBc |
| 谐波 Harmonics@Pout=60dBm | HAM | | -15 | -10 | dBc |
| 输入驻波 Input VSWR | VSWRin | | | 1.5 | :1 |
| 交流电压 AC Voltage | Vac | | 380 | | V AC |
| 交流电流 AC Supply Current | Iac | | 30 | | A |
| 功耗 Power Consumption | Pdiss | | 11000 | 12000 | W |
| 阻抗 Impedance | I/O-IMP | 50 | | | Ohms |

机械特性 Mechanical Specifications:


| 参数 Parameter | 指标 Value | 单位 Units |
|--------------------------------------|---------------------------|----------|
| 输入/输出接口 Input /Output Connector | N Female/WRD250 | |
| 正向/反向耦合 Forward/Reverse Coupling | SMA Female/ SMA Female | |
| 通信接口 Communication Connector | DB9/RJ45 | |
| 液晶显示屏 Front Panel LCD Screen Display | 7 inch LCD Screen Display | |
| 尺寸 Size | 20U | |
| 重量 Weight | ≤250 | Kg |

绝对最大值 Absolute Maximum Ratings:

| 参数 Parameter | 指标 Value |
|------------------------------|----------------------|
| 输入功率 RF Input Power | +5 dBm |
| ESD灵敏度 ESD sensitivity (HBm) | Class 0, passed 150V |

外形图 Outline Drawing:

Unit:mm

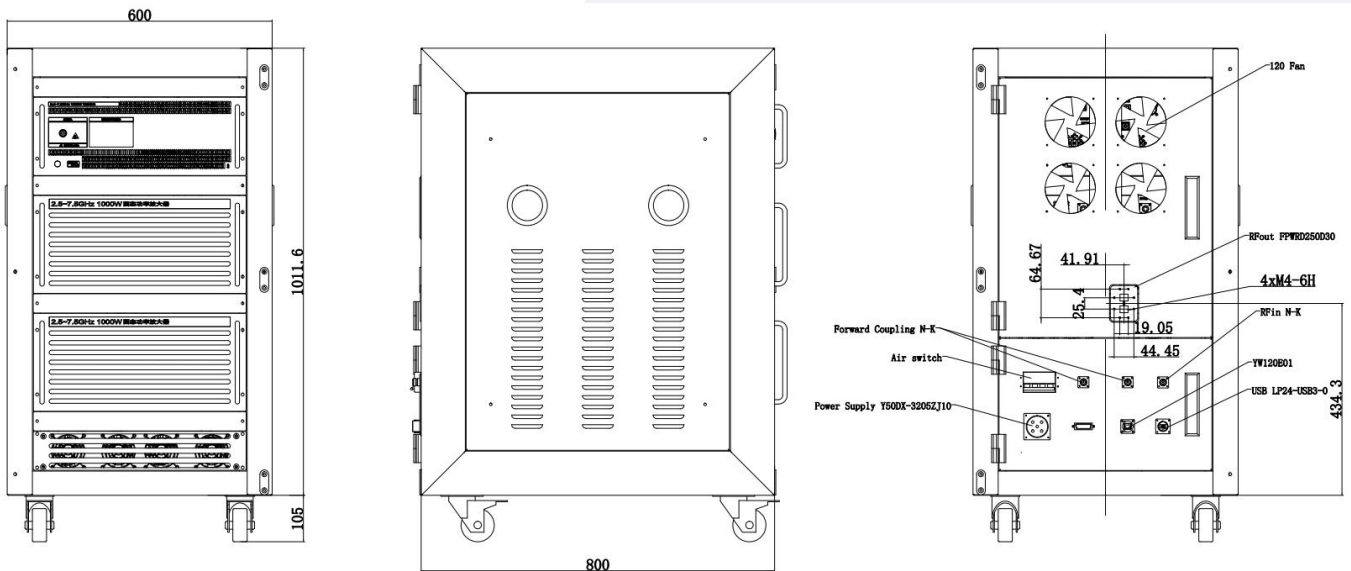

主要功能 Key Features:

| 参数 Parameter | 特点 Advantages |
|-----------------------------|--|
| 控制功能 Control functions | 1, Power setting On/Off 2, ALC automatic level control |
| 内置保护功能 Protection functions | 1, Over TEM 2, Over voltage 3, Over current 4, Over VSWR(3:1) |
| 监控和控制 Remote control | RS422/Ethernet |
| 冷却系统 Cooling system | Built in Cooling system, forced air cooling |

温度环境 Environmental Conditions:

| 参数 Parameter | Min | Typ | Max | 单位 Units |
|------------------------------------|---|-----|-----|----------|
| 操作温度 Operating Temperature* | -20 | | +40 | °C |
| 存储温度 Non-operating Temperature* | -30 | | +50 | °C |
| 相对湿度 Relative humidity | | 95 | | % |
| 海拔 Altitude | 10,000 | | | feet |
| 震动 Shock / Vibration(MIL-STD-810F) | 25g rms (15 degree 2KHz) endurance, 1 hour per axis | | | |
| 冲击 Shock(non operating) | 20G for 11msc half sin wave, 3 axis both directions | | | |

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

| 标准型号 Base Number | 描述 Description | 版本号 Revision |
|---------------------|--|--------------|
| TLPA2.5G6G-60-60-BC | Solid State High Power Amplifier Systems 2.5-6GHz, Gain:60dB, Psat:60 dBm, 380V AC, Built in Fan Cooling | Rev.1.1 |